


Stock **2,2x4,2**

Length	Heated Length	Power	Power Density	Code 2.2 x 4.2
200 mm	135 mm	180 W	5.40 W/cm ²	200CH2242
265 mm	200 mm	200 W	5.40 W/cm ²	265CH2242
315 mm	250 mm	225 W	5.40 W/cm ²	315CH2242
345 mm	280 mm	250 W	5.40 W/cm ²	345CH2242
400 mm	335 mm	275 W	5.40 W/cm ²	400CH2242
450 mm	385 mm	300 W	5.40 W/cm ²	450CH2242
525 mm	460 mm	350 W	5.40 W/cm ²	525CH2242
600 mm	535 mm	400 W	5.40 W/cm ²	600CH2242
700 mm	635 mm	450 W	5.40 W/cm ²	700CH2242
750 mm	685 mm	550 W	5.40 W/cm ²	750CH2242
800 mm	735 mm	625 W	5.40 W/cm ²	800CH22e42
950 mm	885 mm	700 W	5.40 W/cm ²	950CH2242
1000 mm	935 mm	750 W	5.40 W/cm ²	1000CH2242
1175 mm	1110 mm	850 W	5.40 W/cm ²	1175CH2242
1400 mm	1335 mm	1000 W	5.40 W/cm ²	1400CH2242
1600 mm	1535 mm	1150 W	5.40 W/cm ²	1600CH2242
1800 mm	1735 mm	1200 W	5.40 W/cm ²	1800CH2242
2000 mm	1935 mm	1250 W	5.40 W/cm ²	2000CH22422

Price includes thermocouple type "J" and teflon with protection fiber glass 1000 mmm Pure nikel wire conductors.



Protection options

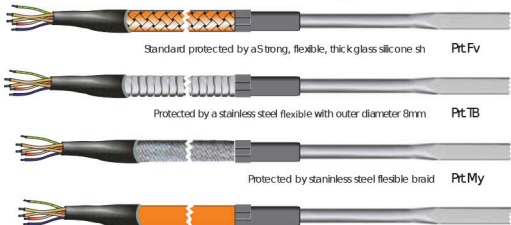

03.01.259688
 EN60335/2/11